


Purple PVC High Gloss Stretch Ceiling Film Heat Resistance OEM ODM

Our Product Introduction

for more products please visit us on realsundeco.com

Basic Information

- Place of Origin: Foshan, China
- Brand Name: Realsun Deco
- Minimum Order Quantity: 3000m/model
- Price: negotiable
- Packaging Details: Pack in roll
- Delivery Time: 15-20 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 500000m/month

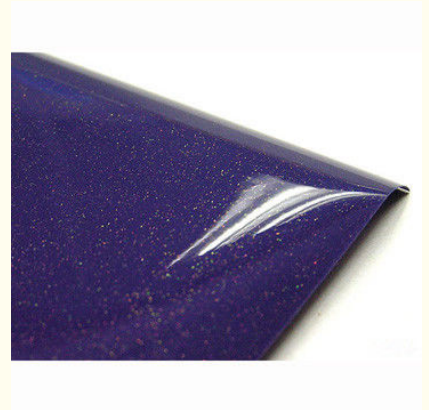

Product Specification

- Length: 100m-400m
- Feature: Non-toxic/ Anti Flame/ Moisture-proof/Anti Scratch
- Service: OEM ODM
- Material: PVC
- Color: White, Red, Blue, Green, Yellow, Black, Cream Etc.
- Usage: Furniture, Kitchen Cabinet, Ceiling, Wall Panel
- Heat Resistance: 120
- Appliaction: Lamination, Vacuum Membrane Press, Wrapping
- Highlight: **PVC High Gloss Stretch Ceiling Film, PVC Ceiling Film Heat Resistance,**

Product Description

Product Description:

Our **PVC Foil** is primarily made from Polyvinyl Chloride (PVC), a synthetic plastic material known for its durability, flexibility, and ease of processing.

It is available in a wide range of colors, patterns, and textures, and can even mimic the look of natural materials such as wood, stone, fabric, or metal at a much lower cost, while still retaining a high-quality aesthetic.

The foil is suitable for application on a variety of surfaces, such as doors, cabinets, furniture, walls, and more, and is easy to adhere to different substrates, making it possible to decorate various interiors in the home.

Realsun Deco PVC Foil is renowned for its durability and strength, so it can stand up to frequent use in high-traffic locations. Little upkeep is needed, and it usually just needs to be wiped down with a moist cloth once a week.

Using PVC decorative foil is also cost-effective since it supplies an upscale look without expensive costs associated with natural materials. Various styles and finishes are also available for modification to meet project specifications and personal design preferences. Decorative PVC foil is often utilized in residential and commercial settings for applications such as wall paneling, interior doors, kitchen and bathroom cabinets, furniture surfaces, retail displays, and much more.

Technical Parameters:

Our aluminum composite panels are available in a range of thicknesses from 0.1mm to 0.5mm. They come with the standard widths of 1,260 mm and 1,400 mm and are offered in rolls of length 100 to 400m. Design-wise, you can choose from a variety wood grain, marble, brick, solid colors and other options.

These panels feature various surface treatments like matt, super matt, embossed, high gloss and even a popular soft touch. We also offer customization services such as OEM and ODM to fulfill your specific requirements.

Applications:

Membrane Press (vacuum press)

Membrane Press or vacuum press is suitable for covering a range of materials from MDF, particle board, wooden board, fiber board, etc. This process is mainly used for covering doors, kitchen cabinet, wardrobe and furniture. This process covers five surfaces at the same time and the thickness of the product is between 0.20-0.50mm, with a width of 1260mm and 1400mm and length of 100-300m per roll.

Wrapping Profiles

Wrapping Profiles is usually used for covering a range of different profiles such as wood profile, aluminum profile, PVC profile, etc.

specially for door frame, window sill, base channel, PVC ceiling and so on. The thickness of the product is between 0.12-0.18mm, with a width of 40-1260mm and the length of 300-800m per roll.

Cold Laminating

Cold Laminating is suitable for covering flat panels such as wood panel, steel panel, aluminum panel and PVC panel. The products of this process are usually used for doors and furniture. The thickness of the product is in between 0.12 and 0.20mm, with a width of 1240-1260mm and the length of 300-500m per roll.

Hot Laminating

Hot Laminating process is used for covering materials such as PVC panel, steel panel and aluminum panel. These products are usually applied on doors, skirting and so on. The thickness of the product is between 0.16-0.30mm, with a width of 1260mm and the length of 200-300m per roll.

Self-adhesive

The self-adhesive process is mainly used for furniture and indoor decorations. Its thickness is between 0.10-0.20mm, with a width of 600mm/1220mm and the length of 5-50m per roll.

Customization:

High Gloss PVC Film

Realsun Deco's high gloss PVC films are made of high quality PVC material with a glossy surface, providing excellent printability, durability and weatherability. They are non-toxic, anti-flame, moisture-proof and anti-scratch. The heat resistance is up to 120 . Our PVC films are available for OEM and ODM services.

Keywords: high gloss pvc foil, glossy surface pvc sheet, glossy surface pvc sheet, pvc film

Brand Name: Realsun Deco

Place of Origin: Foshan, China

Service: OEM, ODM

Surface Treatment: High Gloss, Smooth

Feature: Non-toxic/ Anti Flame/ Moisture-proof/Anti Scratch

Material: PVC

Heat Resistance: 120

Support and Services:

High Gloss PVC Film Technical Support and Service

24/7 online technical support

On-site installation and training

Free product upgrade and maintenance
Warranty and return policy
Troubleshooting and problem-solving
Questions and feedback handling

Packing and Shipping:

Packaging and Shipping of High Gloss PVC Film:
The product is packed in rolls and wrapped in a plastic film.
The rolls are labeled as per the customer's requirements.
The rolls are then shipped using a reliable shipping service.



Foshan Realsun Decorative Material Co., Ltd.



+8613790066054



sale1@realsundeco.com



realsundeco.com

Room 706, Build 1, No 121 North of Lingnan Avenue, Foshan, China